

METHOD AND DEVICE FOR CHARACTER INPUT USING PUSH BUTTON

Publication number: JP10307662

Publication date: 1998-11-17

Inventor: SATO TORU

Applicant: NIPPON TELEGRAPH & TELEPHONE

Classification:

- International: G06F3/02; G06F3/02; (IPC1-7): G06F3/02; G06F3/02

- European:


Application number: JP19970115567 19970506

Priority number(s): JP19970115567 19970506



Report a data error here

Abstract of JP10307662

PROBLEM TO BE SOLVED: To enable character input without an error even on a push button(PB) telephone sets having no display device. **SOLUTION:** An input person presses a PB corresponding to a desired character to be inputted and the depression state is detected by a PB signal receiving means 502; and an input information decision means 503 discriminates the character that the input person has inputted and a voice output means 504 inputs a voice signal of the decided character to the PB telephone set 100, so that the character is voiced through a speaker 102. The input person releases the PB from being pressed when the voice corresponding to the desired character to be inputted. Thus, necessary character input is done. Similarly, other characters are inputted in order by following the same procedure.

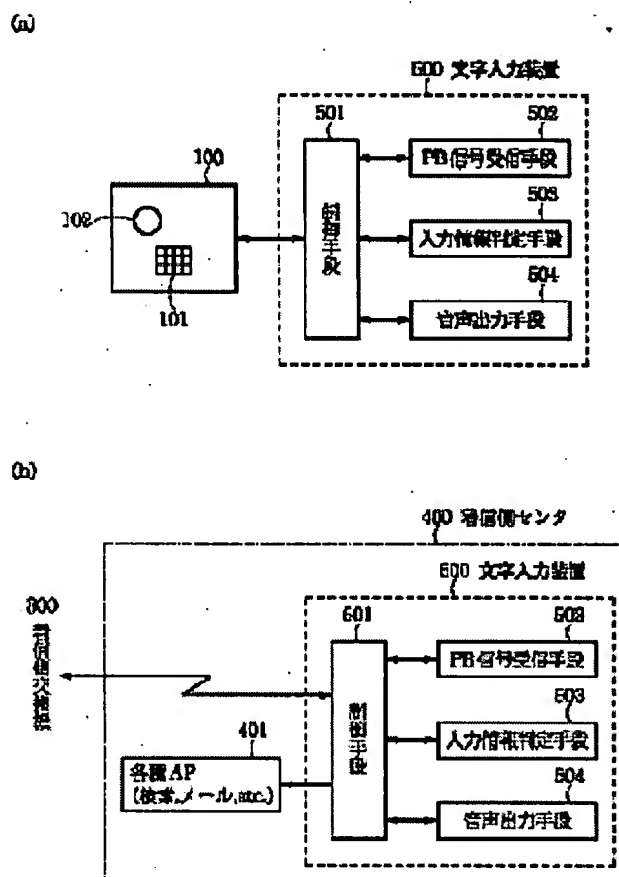


Data supplied from the esp@cenet database - Worldwide

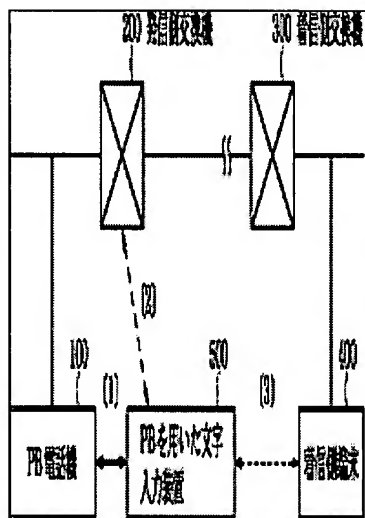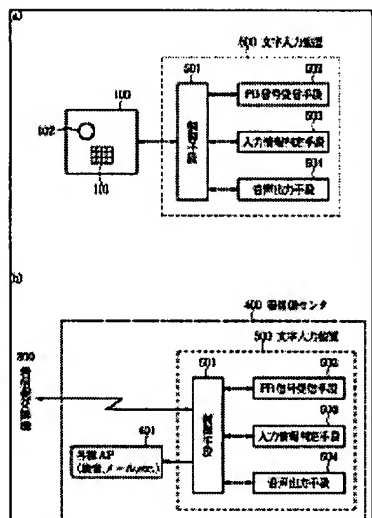

第2信号	[1]	[2]	[3]	[4]	[5]
第1信号					
[1]	あ	い	う	え	お
[2]	か	き	く	け	こ
...
[8]	や	-	ゆ	-	よ
[9]	ら	り	る	れ	ろ
[0]	わ	を	ん		

Drawing pages of JP10307662

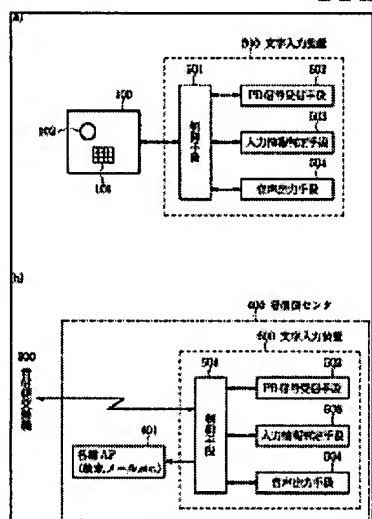

信号数	1個	2個	3個	4個	5個
信号種類					
[1]	あ	い	う	え	お
[2]	か	き	く	け	こ
...
[8]	や	ゆ	よ		
[9]	ら	り	る	れ	ろ
[0]	わ	を	ん		

割り振り文字	第1候補	第2候補	第3候補	第4候補	第5候補
信号種類					
[1]	あ	い	う	え	お
[2]	か	き	く	け	こ
...
[8]	や	ゆ	よ		
[9]	ら	り	る	れ	ろ
[0]	わ	を	ん		

